




U.S. Tsubaki Power Transmission, LLC
U.S. Tsubaki Holdings, Inc.
Corporate Headquarters
301 E. Marquardt Dr.
Wheeling, IL 60090 USA

Toll Free: 800.323.7790
Phone: 847.459.9500
Fax: 847.459.9515
Email: sales@ustsubaki.com
Website: www.ustsubaki.com

ITEM # RS40CU A-1, CURVED CHAIN ATTACHMENT

U.S. Tsubaki Curved chain has additional clearance between the pins and bushings and between the roller links and pin link plates to permit extra flexibility and greater lateral displacement. The [+ more](#)

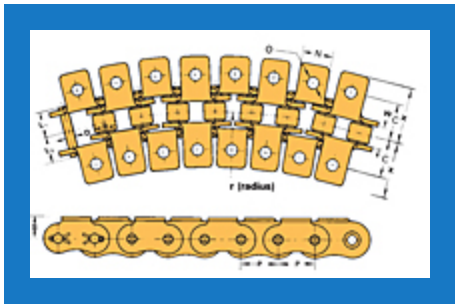


[Specifications](#) | [Chain Specifications](#) | [Pin Specifications](#) | [Link Plate](#) | [Attachment Specifications](#)

Specifications -

ANSI No.	40
Attachment Number	A-1

Chain Specifications -



Pitch	0.500 in
R - Roller Diameter	0.312 in
W - Width Between Roller Link Plates	0.312 in
r - Min. Radius of Side Bow	14.000 in
Average Tensile Strength	3480 lb
Maximum Allowable Load	420 lb
Approx. Weight	0.410 lbs/ft

Pin Specifications

D	0.156 in
L1	0.333 in
L2	0.384 in
L1+L2	0.717 in

Link Plate

T - Link Plate	0.060 in
t - Link Plate	0.060 in
H - Link Plate	0.472 in
h - Link Plate	0.409 in

Attachment Specifications

N	0.374 in
S	0.315 in
X	0.709 in
C	0.500 in
O	0.141 in
Additional Weight per Attachment	0.004 lb